

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/030793 A1

- (51) International Patent Classification⁷: **B01D 45/12**, B04C 5/103, 5/04
- (21) International Application Number: **PCT/NO2003/000327**
- (22) International Filing Date:
30 September 2003 (30.09.2003)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20024729 2 October 2002 (02.10.2002) NO
- (71) Applicant (for all designated States except US): **STATOIL ASA** [NO/NO]; N-4035 Stavanger (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GJERTSEN, Lars, Henrik** [NO/NO]; Fortunalia 62, N-7057 Jonsvatnet (NO). **FREDHEIM, Arne, Olav** [NO/NO]; Tingveien 21C, N-7046 Trondheim (NO). **JENSSEN, Carl-Birger** [NO/NO]; Schmidts gate 5, N-7052 Trondheim (NO). **GJØEN, Bård** [NO/NO]; Sjølystv. 78, N-7562 Hundhamaren (NO).
- (74) Agent: **TANDBERGS PATENTKONTOR AS**; Boks 7085, N-0306 Oslo (NO).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SCRUBBER

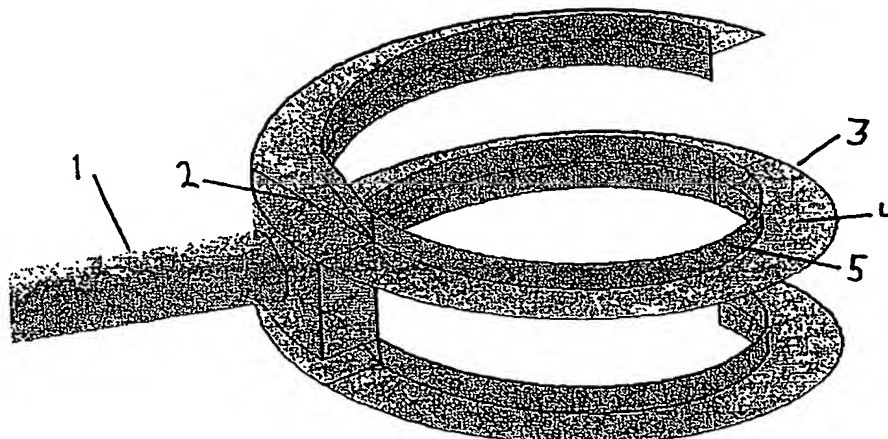

(57) Abstract: Scrubber for separation of liquid phase and any other constituents from a fluid flow that in substance is comprising a gas, which scrubber is formed as a standing vessel with round cross section, with outlet for liquid from the bottom and outlet for gas from the top. The scrubber is distinguished in that it is comprising: a fluid inlet that either is tangentially oriented to the inner wall of the scrubber or equipped with a deflection plate, such that introduced fluid is directed tangentially horizontal or with a small downward slope along the inner wall of the scrubber, into and through a fluid way arranged as a downwards directed spiral within the scrubber, along the inner wall, from a level over or at the inlet to a level at or close to the outlet for liquid, with opening for gas escape inwards of the center of the scrubber. The scrubber according to the invention results in very low liquid entrainment.

WO 2004/030793 A1